

# **SharkBite**<sup>TM</sup>

## **Poly Coupling**

SharkBite™ expansion fittings are designed for use with PEX-a tubing and must be used in conjunction with SharkBite expansion rings. SharkBite expansion fittings have a 25-year system warranty when used with SharkBite PEX-a tubing.

#### **Approved Applications**

Residential and commercial potable water, recirculation, reclaimed water systems, hydronic heating/cooling (up to 50% glycol concentration) and direct burial.

### **Specification Data**

Materials	
Body	PPSU


Performance			
Max Working Press	ure		
80 psi	at	200°F	
100 psi	at	180°F	
160 psi	at	73.4°F	

Minimum Length of Pipe Connecting Two Fittings			
Fittings/Pipe Size	Min. Length	Insertion Depth	
1/2 in.	4 in.	0.72 in.	
3/4 in.	5-1/2 in.	0.97 in.	
1 in.	7 in.	1.19 in.	
1-1/4 in.	9 in.	1.46 in.	
1-1/2 in.	11 in.	1.72 in.	
2 in.	14 in.	2.17 in.	

#### **Certifications & Listings**

ASTM F1960, ASTM F877, CSA B137.5, NSF/ANSI 14, NSF/ANSI/CAN 61, NSF/ANSI/CAN 372, ASTM E84, CAN/ULC S102.2, ASTM E119, CAN/ULC S101

For listing information, please contact Customer Service.

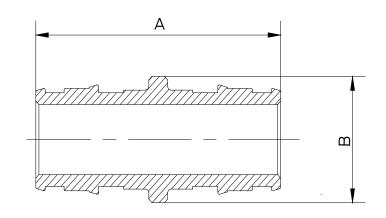

Dimensions (inches)			
Part #	Size	A	В
800AU	1/2"	1.56	0.85
UA016	3/4"	2.04	1.25
UA020	ן"	2.51	1.42

Product Submittal		
Name		
Date		
Architect/Owner		
Contractor		
Tag		
Notes		

Rev 2.0 / 12-9-22 Page 1 of 1 EN-US

